



HYPROOF  
WATERPROOFING  
MEMBRANE

CHAMFER IF REQ'D



NOTE: ANY MEMBRANE  
LAP REQUIRED IS TO BE  
A MINIMUM OF 3"  
OVERLAP HOT AIR  
WELDED LOCATED A  
MINIMUM OF 6" FROM  
EITHER AN INSIDE OR  
OUTSIDE CORNER

3/4"HYLOAD TROWEL ON  
MEMEBRANE

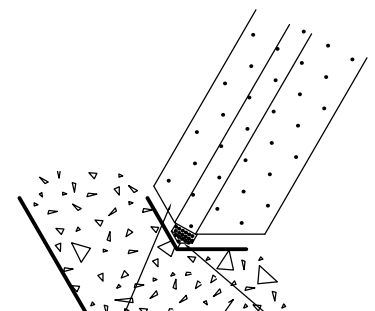

HYPROOF  
WATERPROOFING  
MEMBRANE

# HYLOAD WATERPROOFING

## CORNER DETAILS

SIZE A	DWG NO. WP015	REV A
-----------	------------------	----------

SCALE NTS	DRAWN BY GDS	SHEET 1 of 1
--------------	-----------------	-----------------